



8-A, National Highway, Lakhdhirpur Road, Morbi - 363 642 (Gujarat) INDIA.

E | info@swizzerceramic.com, sales@swizzerceramic.com, export@swizzerceramic.com

Customer Care | +91 99786 00426



www.swizzerceramic.com























About Company

SWIZZER is all geared-up to storm the Vitrified Tiles Market. Not overlooking the Indian Customer's preference for style and look, we would introduce the range in a wide array of captivating and contemporary design and colors. To give a better after-fit finish Swizzer Vitrified tiles are having superb polishing and nano technology equipped unit.. We have built a reputation for delivering high-end quality vitrified tiles products to our customers. Swizzer-vitrified tiles manufacturer is dedicated to achieve highest levels of customer's satisfaction by continuously improving Quality and product range to deliver high value to customers.

Swizzer has long been known for its product quality and customer service. We are world's leading vitrified tiles manufacturers situated in morbi - Swizzer is the most talented vitrified tiles manufacturer of morvi-floor tiles hub of India. Like the tropical storms in the Atlantic Ocean from where we have derived our name from, we at Swizzer Vitrified Tiles Pvt. Ltd., are here with a storm of passion to bring a revolution in Designing and architecture. We have Granito tiles in various size like 600 x 600 mm, 800 x 800 mm to give a better after-fit finish.



Morchana

Waves

Marbella

Pyramid



Wind



Marfil



6 0 0 x 6 0 0 m m VITRIFIED TILES









Feather

Teakwood

Bianco

Carara



Sleekwood




Lamina



6 0 0 x 6 0 0 m m VITRIFIED TILES



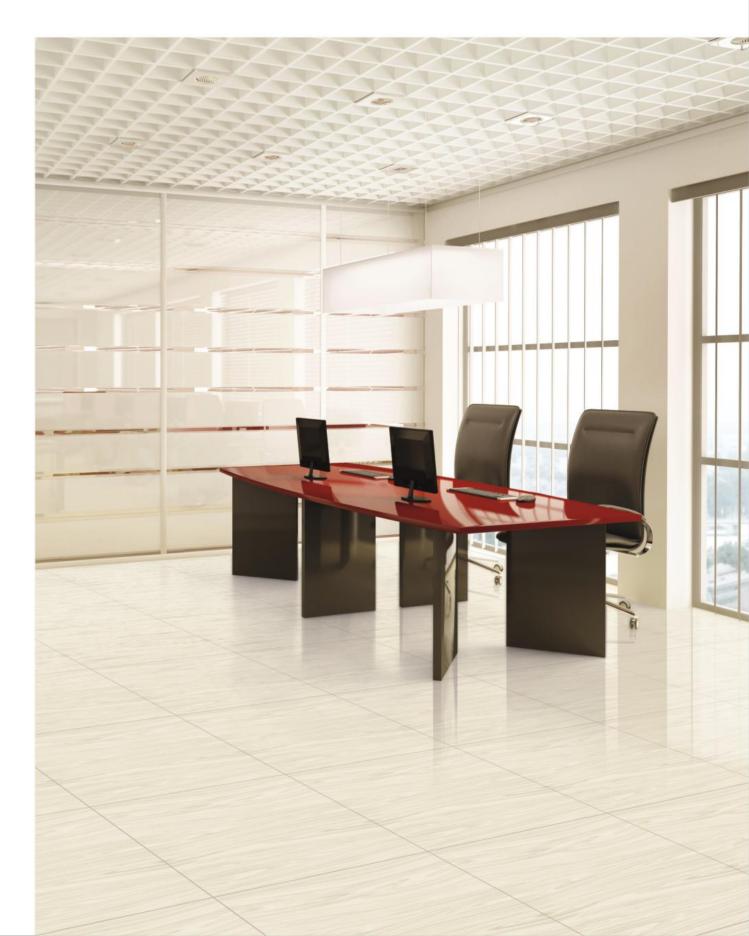



Skyfall



Bamboo



Magic Square



Stonera



Rivera



Chattai



6 0 0 x 6 0 0 m m VITRIFIED TILES







Rimzim

Coastal

Ripple



Eden









TECHNICAL SPECIFICATION

TECHNICAL PARAMETERS	ASTM	CEN	ISO	INT. STD	SWIZZER VITRIFIED
Deviation in length/width	C 499	EN 98	10545-2	± 0.6%	± 0.3%
Deviation in Thickness	C 499	EN 98	10545-2	± 5.0%	± 3.0%
Straightness of side	-	EN 98	10545-2	± 0.5%	± 0.3%
Rectangularity	-	EN 98	10545-2	± 0.6%	± 0.4%
Surface flatness	C 485	EN 98	10545-2	± 0.5%	± 0.4%
Water absorption	C 373	EN 99	10545-3	≤ 0.5%	≤ 0.05%
Scratch hardness (Moh's)	C 849	EN 101	-	≥ 6	>7
Modulus of Rupture (N/mm²)	C 648	EN 100	10545-4	≥ 27	≥ 45
Breaking Strength (N)	C 648	-	*:	1113 N	> 2600 N
Skid resistance	C 1028	-	DIN51130	> 0.4	> 0.5
Abrasion resistance (N/mm³)	+	EN 102	10545-6	204	< 190
Linear thermal expansion (/ C)	C 372	EN 103	10545-8	9X10 ⁻⁶	≤ 7x10 ⁻⁶
Thermal shock resistance	C 484	EN 104	10545-9	No damage	No damage
Colour resistance to light	DIN 51094	-	10545-16	No change	No change
Glossiness (Reflection)	-	-	-	-	70-85
Chemical resistance (Except HF)	C 650	EN 106	10545-13	No damage	No damage
Density (gm/cc)	₹.		DIN51082		2.3
Frost resistance	-	-	10545-12	Frost Proof	Frost Proof
Decorative Faults	-	-	10545-2	Defect free	Defect Free
Surface Quality	-	-	10545-2	95%defect free	> 95%
Impact Resistance		-	41	Good	Good
Crazing Resistance	2		10545-11	No Crazing	No Crazing
Resistance to	€.		10545-13	No visible	No visible
house hold chemicals				effect	effect

Size	No. Of Tiles / Box	Coverage Area	
600mm x 600mm	4 Pcs.	1.44 Sq. Mt.	



















Liner

07 - 08